



GLOBAL EAST ASIA TECHNOLOGY CO.,LIMITED

Product name:4T4R MIMO Omnidirectional antenna

PN:GLQ0660

Application

Used in 2G/3G/4G/5G/WLAN system

Frequency range (MHz)	617~960	1710~2700	3300~4200	4900~6000
Polarization	4*Vertical			
Maximum Gain (dBi) (based on 30cm ³ cable)	3	5	5	5
Horizontal beam width (°)	360			
Typical Vertical beam width (°)	85	70	55	28
Impedance (Ω)	50			
VSWR	≤3.0			
Maximum power (W)	50			


Mechanical specifications

Connector	4 * N Female(or Customized)
Customized Cable Length (cm)	50(or Customized)
Connector position	Bottom
Antenna size (mm)	Φ 145* 173
Packing size (mm)	323* 165* 165
Weight (kg)	≤1 . 1 (Include bracket)
Radome material	ABS
Radome color	White
Operating humidity (%)	5~95
Operating temperature (°C)	-40~60
Application	Outdoor
Rated wind velocity (m/s)	40
Suitable pole diameter (mm)	Φ 30- Φ 50
Ingress Protection	IP65 (After blocking the water outlet hole)


Add: Room826, Floor 8,BLDG 13, University Science Park(East), Zhengzhou City, P.R.Henan, China.
 Tel: 86-371-65097986/86-371-60911368 Email:info@global-antenna.com
 Web:<https://www.asialeren.com> <https://www.global-antenna.com>




617~960MHz Typical pattern

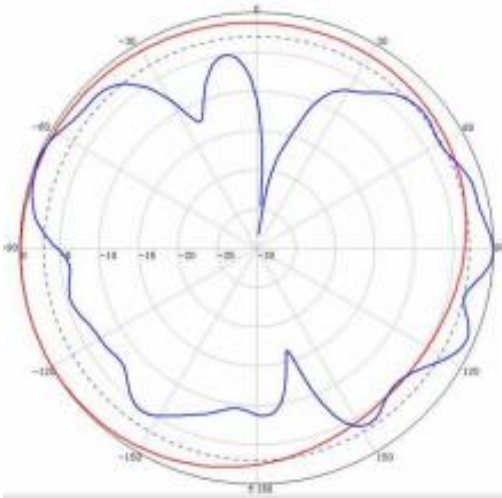

1710~2700MHz Typical pattern

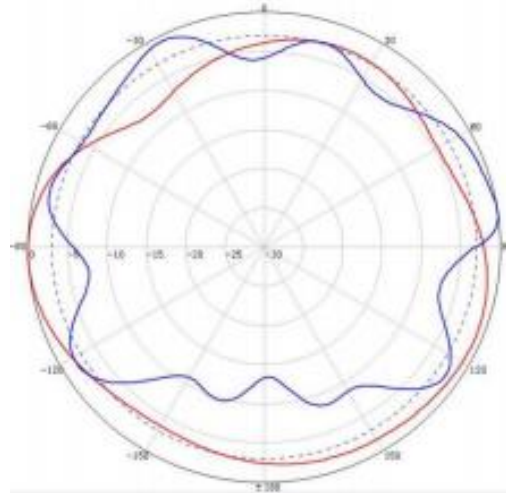


3300~6000MHz Typical pattern

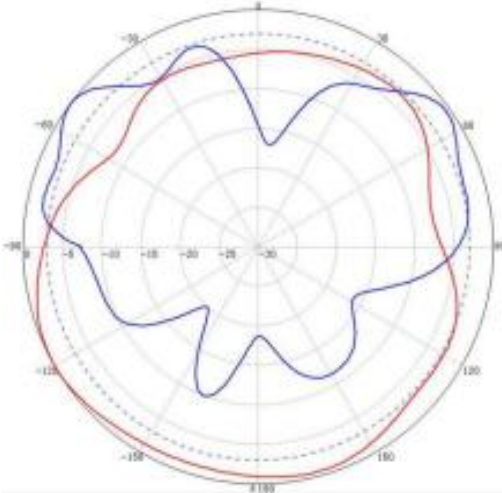

Product pictures



Product size

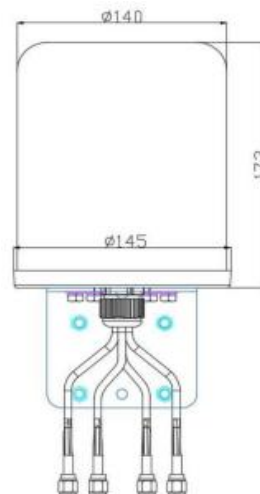

Add: Room826, Floor 8,BLDG 13, University Science Park(East), Zhengzhou City, P.R.Henan, China.
Tel: 86-371-65097986/86-371-60911368 Email:info@global-antenna.com
Web:<https://www.asialeren.com> <https://www.global-antenna.com>



Installation Sketch

