




BASE STATION ANTENNA

GLTDTF23H 150-174 MHz 3-Section Base Station Antenna

MODEL GLTDTF23H

Three-section fiberglass base station antenna covering 150-174 MHz with 7.8 dBi gain.

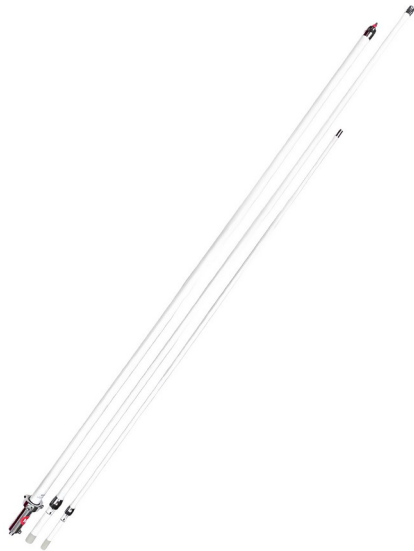

KEY PERFORMANCE

150-174 MHz

FREQUENCY RANGE

7.8 dBi

GAIN

< 1.5

VSWR

5200 mm

LENGTH

TECHNICAL SPECIFICATIONS

ELECTRICAL SPECIFICATIONS	
Frequency range	150-174 MHz
Gain	7.8 dBi
VSWR	< 1.5
Max. power	350 W
Impedance	50 ohm
Radiation pattern	Omnidirectional
Polarization	Vertical
MECHANICAL SPECIFICATIONS	
Type	Base station antenna
Structure	3-section
Length	5200 mm
Material	Fiberglass + copper
Antenna connector	SO239
Rated wind resistance	40 m/s
Applicable support pole diameter	30-62 mm
Accessories	Radiating element x3; U-clamp x2; cutting drawing x1

GLOBAL RF TECH

Zhengzhou LEHENG Electronic Technology Co., Ltd.
<https://globalrftech.com/> | Email Sales | Call Us

NEED A CUSTOM CONFIGURATION?

Frequency, connector, cable length and mounting options can be reviewed for your project.

[Request a quote](#)